

## \* How to Download SAMSUNG BADA S8500 \*


Mar 2010

### 1.0 Preparations & Connection


- Prepare Mini USB cable for connecting to PC with Mobile.
- Before do this download procedure, Samsung Broadcom USB Driver must be in the PC.
- You have to set up "**semseyite-V5\_02\_0\_0-customer-free**" modem driver to download SW properly.

### 2.0 Setting & Downloading


- Connect the cable to S8500 while you **press SEND and Power Button(Before JC3) or Volume DOWN + LOCK key and Power Button(onward JC3)** (You can see '**DOWNLOAD**' message on the LCD)
- Run S8500 downloader (**MultiLoader\_V5.62.exe**) application as below.
- Select LSI6410 as below

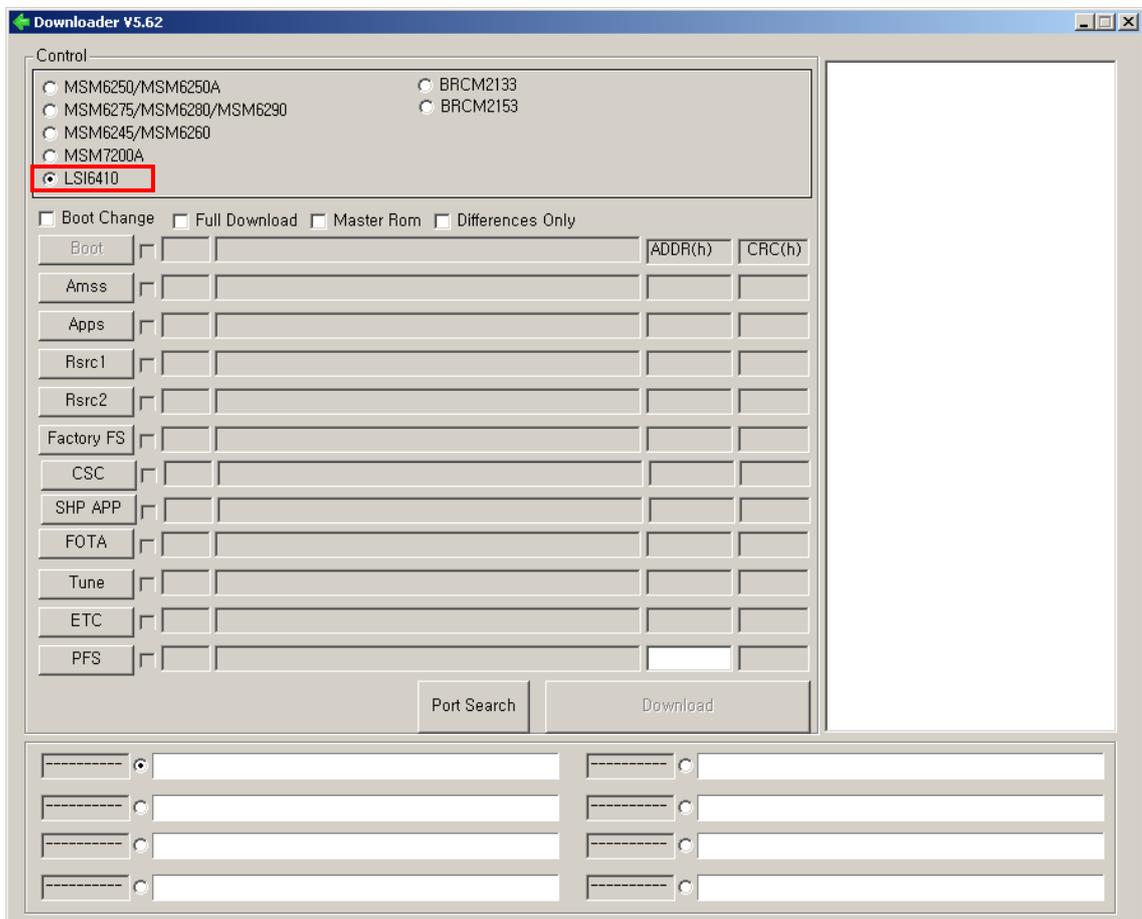

- Tick **Boot Change** and and Tick **Full Download**

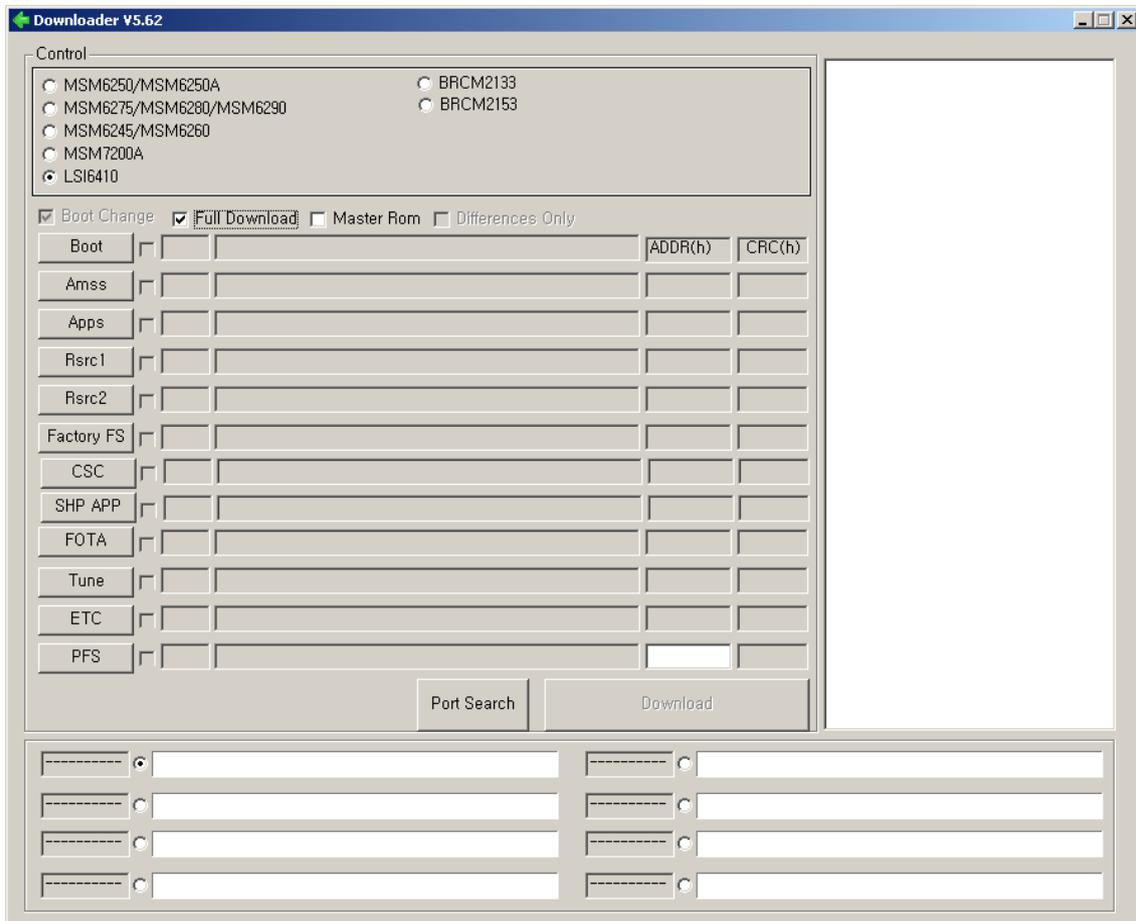

- Click **Boot** and select Boot folder.
- **CAUTION** : please do not select **BOOTFILES\_EVTSF** folder, the sample should be dead
- Click **AMSS** and select '**amss.bin**' file which is located in the PC
- Click **Apps** and select '**apps\_compressed.bin**' file which is located in the PC
- Click **Rsrc1** and select '**Rsrc\_Open\_Europe\_Common.rc1**'
- Click **Rsrc2** and select '**Rsrc2\_(Low/Mid).rc2**'
- Click **Factory FS** and select '**FactoryFs\_Open\_Europe\_Slav.ffs**'
- Click **CSC** and select '**S8500XXXX.csc**'
- Click **SHP APP** and select '**ShpApp.app**'
- **Otherwise you can drag and drop**
- After connecting the mobile with PC, Multiloader will be find the COM port automatically. If it cannot find COM port please connect USB cable again and press port search.
- Click **Download** [You will see the downloading progress bar].

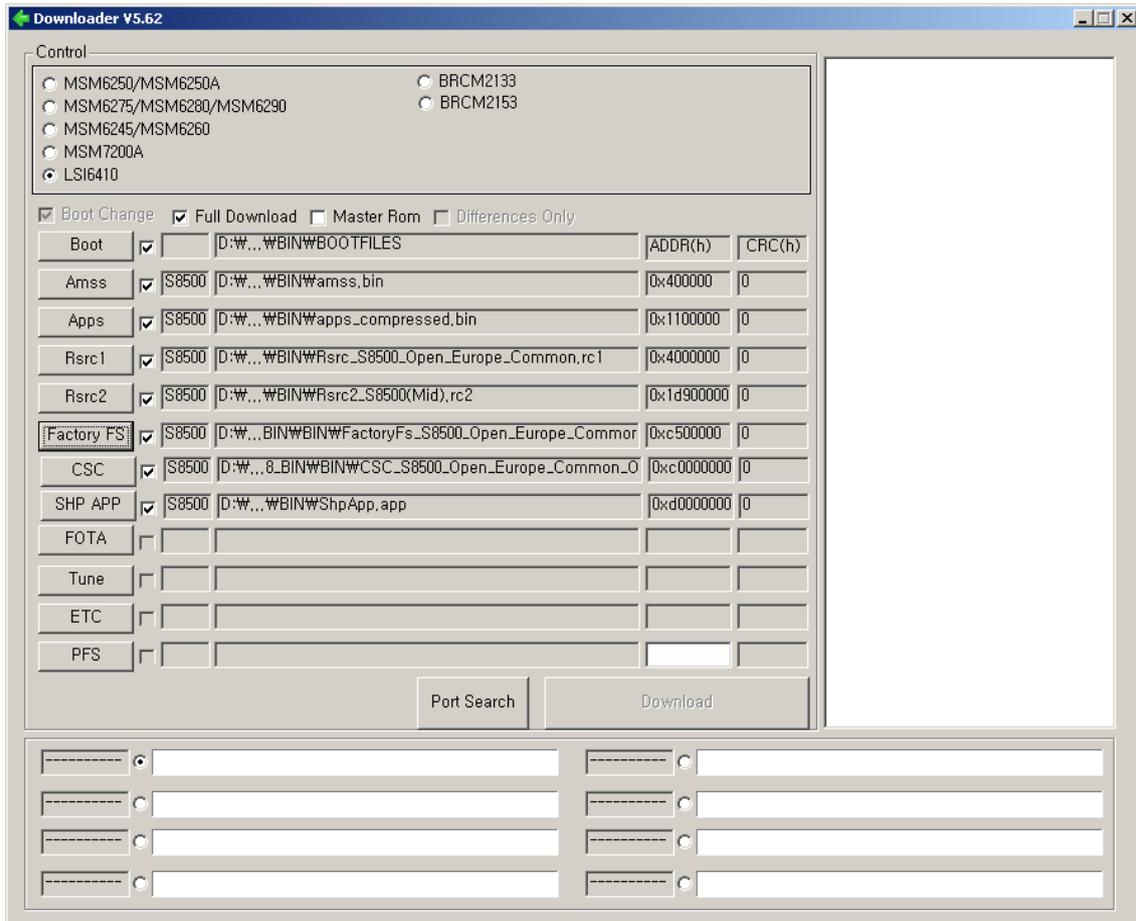

-After finishing downloading, the mobile will be starting automatically.

### 3.0 Set configurations for your settings with String codes.

- Administration mode: `*#5239870*#`
- Pre-configuration: Administration mode -> `*#27236*#`
- Internal mode: Administration mode -> `*#7092463*#`
- Camera Firmware update -> `*#36287#` -> Press 3 then wait for 4 min

**CAUTION:** If your sample is not able to update camera firmware, you have to backward to XXJB5 version and

1. `*#197328640#`
2. Select "6. Video "
3. Select "3. Camera Firmware Update"
4. Wait for 4 min.
5. Flash latest SW again.